



## DATA DRIVEN BIKE FITTING

Jarich Braeckevelt<sup>\*†</sup>, Pieter Mertens<sup>†</sup>, Erik Witvrouw<sup>°</sup>, Steven Verstockt<sup>\*</sup>

<sup>\*</sup> Ghent University - imec, IDLab

AA Tower, Technologiepark-Zwijnaarde 19, 9052 Gent

<sup>°</sup> Ghent University, REVAKI

Campus Heymans (UZ Gent), De Pintelaan 185, 9000 Gent

<sup>†</sup> Bioracer Motion,

Industrieweg 114, 3980 Tessenderlo

E-mail: jarich.braeckevelt@bioracermotion.com

### ABSTRACT

During bike fitting sessions, the optimal cyclist' position is determined. Finding this optimal cycling position is often a time-consuming and labor-intensive process, i.e., a standard bike fitting procedure takes at least two hours when done by an expert bike fitter. The best position is a combination of comfort, performance and injury prevention [1,2,3,4]. To get to this optimal position, a series of adjustments are made to the bike configuration. To date, however, bike fitting suffers from expert subjectivity as there is no consensus among bike fitters on which parameters to focus on. In order to examine this hypothesis about expert subjectivity, a reproducible test methodology is currently under development to perform and evaluate a bike fit by a group of independent experts in Flanders. Results of these tests will be discussed during the presentation.

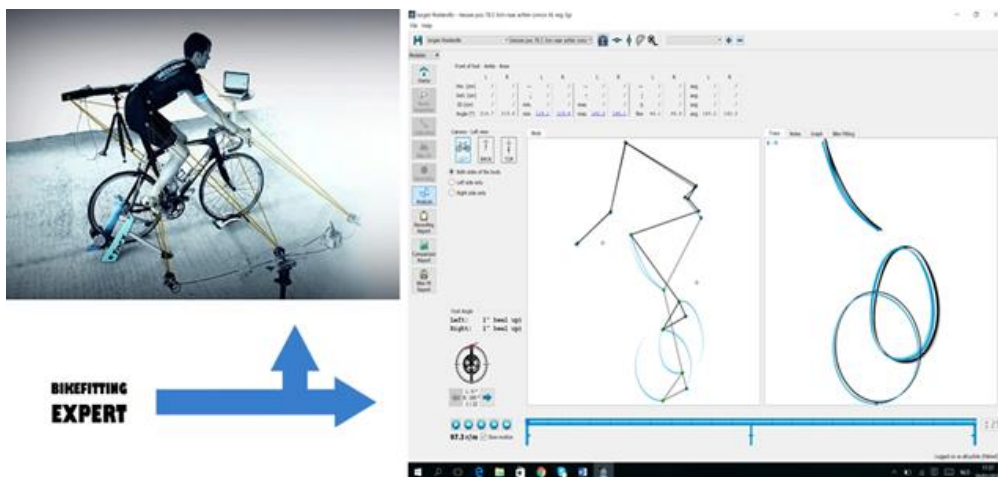


Figure 1: an overview of the Bioracer Motion mo-cap system on the left, and on the right a screenshot of the Bioracer Motion analysis software

To solve the expert subjectivity problem, and to improve the overall fitting process, we started a research project to develop a methodology to perform automatic bike fitting based on novel data-driven decision-making processes. The data is provided by the Bioracer Motion mo-cap system, which consists of two arrays of high-speed infrared cameras which capture positional data of the active infrared markers which are placed on the cyclists' body.



Up till now, mainly rule-based feature engineering techniques were studied and evaluated on the Bioracer Motion datasets. Biomechanical experts their experience was used as an input to the system and also to verify new findings.

Preliminary experiments focusing on saddle height optimization already show the feasibility of the proposed methodology. Saddle height is a determining factor in knee injuries [5,6,7] and the outputted power [8]. However, it is important to mention that saddle height optimization is only a small step in the bigger bike fitting process, as there are many other parameters that should be optimized [9].

In the saddle height experiments our methodology was to compare three different bike configurations (i.e., saddle too high, too low and the 'optimal' position) for different pairs of markers. An example of these spatio-temporal comparisons is shown in Figure 2. This graph shows the relation between the crank angle speed and the right knee Z speed over time. A good feature to track would be the occurrence of the minimum with regard to the crank angle. If the saddle is in a position that is too high, for example, the minimum occurs at a particularly lesser crank angle. Several of these kind of features are evaluated on the Bioracer Motion dataset to determine the rate of true positives and false positives for each of the features. The lesser false positives, the higher the weight of this feature. In the end, a series of eight features (focusing on the left/right foot and knee movement in X/Y direction) are fed into a weighted feature sum, based on which the saddle height correction is suggested. This methodology results in a 100% correct saddle height up to an accuracy of 5mm for a test set of 40 fits.

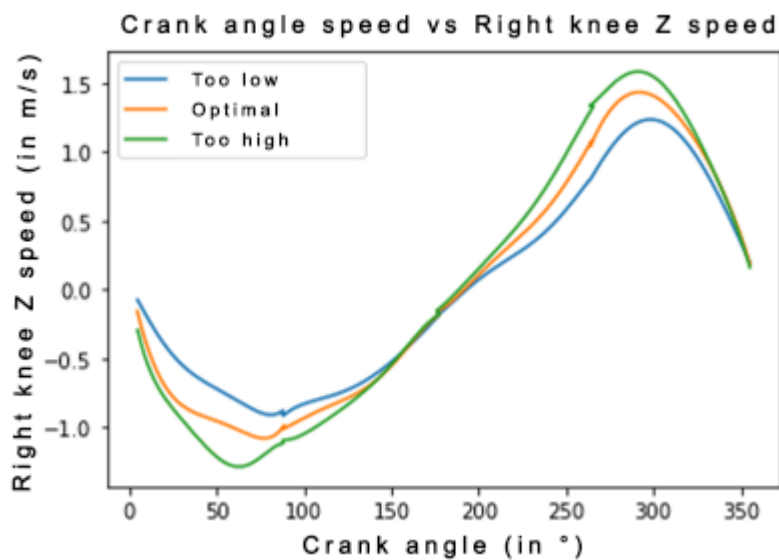


Figure 2: a plot of the Right knee Z speed in regard to the crank angle for three different saddle height configurations



Future work will include other optimizations (i.e. saddle setback, handlebar drop, ... ) and evaluate machine learning techniques to determine new features. The final goal of our project is to have a fully autonomous bike fitting system, which can fit a cyclist with sufficient accuracy in a short period of time. This system will have a significant impact on the cycling world, as less knowledge will be required to successfully fit cyclists. However, it should be noted that there will still be a need for good bike fitters to fit the professional cyclists, as well as to provide feedback for the data-drive bike fitting system.

## **KEYWORDS**

Bike fitting, data-analytics, feature learning

## **REFERENCES**

- [1] P. Burt, "Bike Fit: Optimise your bike position for high performance and injury avoidance.", Bloomsbury Sport, ISBN: 978-1408190302, (2014).
- [2] N. J. Dinsdale, "Body Position Can Affect Cycling Comfort, Overuse Injury, and Performance: A Review of the Literature, Part I.", *The Journal of Cycle Coaching*. 1, 12-17, (2014).
- [3] P. Quesada, P. Pérez-Soriano, A.G. Lucas-Cuevas, R. Salvador Palmer, R. Cibrián Ortiz de Anda, "Effect of bike-fit in the perception of comfort, fatigue and pain.", *Journal of Sports Sciences*, 35(14),1459-1465, (2017).
- [4] E. Welbergen, L. P. V. M. Clijsen, "The influence of body position on maximal performance in cycling. *European Journal of Applied Physiology and Occupational Physiology*", 61(1-2), 138-142, (1990).
- [5] M.D. Asplund, and P. St Pierre, "Knee pain and bicycling, *The Physician and Sports Medicine*", 32:23-30, (2004).
- [6] R. Bini, P. Hume, and J. Croft, "Effects of bicycle saddle height on knee injury risk and cycling performance", *Sports Medicine*, 41(6), 463-476, (2011).
- [7] B. Rodrigo, A. Hume Patria, J.L. Croft, "Effects of Bicycle saddle height on Knee injury Risk and Cycling Performance.", *Sports Medicine*, 41 (6): 463-476, (2011).
- [8] W. Peveler, J. Green, "Effects of saddle height on economy and anaerobic power in well trained cyclists", *Journal of Strength and Conditioning Research*, 25(3),629-633, (2011).
- [9] H. Gonzalez, M.L. Hull, "Multivariable optimization of cycling biomechanics, *Journal of Biomechanics*", 22(11), 1151-1161, (1989).